



Industrial extension cord 32 A with ModBUS single-phase power meter

- Integrated Power Meter
- Supports loads up to 32 A
- Extension length of 3 m
- RS485 ModBUS Output

KET-RKE-032

Applications

Data center

Versius

KET-RKE-063.P32S32

KET-RKE-063

Accessories

KET-RKM-100

KET-RKS-100

KET-RKY-101

KET-RKY-100

KET-RKE-032 is an industrial extension cord with an integrated **single-phase current meter** that supports loads up to 32 A.

It is equipped with an RS485 port to connect to other KET-RKE series in daisy-chain (with KET-RKY-101 accessory cable) and to the Rack Monitor KET-RKS or KET-RKM (with KET-RKY-100 accessory cable).


The extension has a total length of 3 m and has a three-pole connector (phase, neutral, ground) that sports 230 VAC @ 32 A.

CODE

KE
T-
P
M
M-
31
0

Technical Features

General specifications	Protection Range: Case: IP56; Socket: IP67 Operative Temperature: -25 ÷ +55 °C Storage Temperature: -40 ÷ +70 °C Relative Humidity: MAX 95% not condensing
Case	Dimensions: 160 x 115 x 85 mm (W x H x D) Mounting: Wall Material: Thermoplastics
Power supply	Supply Voltage: Self power, 230 VAC (50 Hz) Consumption: <10 VA Connectors types: Industrial extension of 3 m (5 x 6 mm ²) with 3-pin connectors (phase, neutral and ground)
Rs485 interface	Supported Protocols: ModBUS RTU Communication Rate: 38400, 19200, 9600, 4800 bps Isolation: Class II Connectors types: 1 RJ45 for connection to other extensions and 1 RJ45 for connection to the rack
Current and voltage input	Voltage Inputs: 230 VAC Current Inputs: 32 A @ 50 Hz
Certifications	Referends Standard: EN50470, IEC61000, EN55022, IEC60068, IEC60529, IEC60695-2-11 Approvals: CE, MID

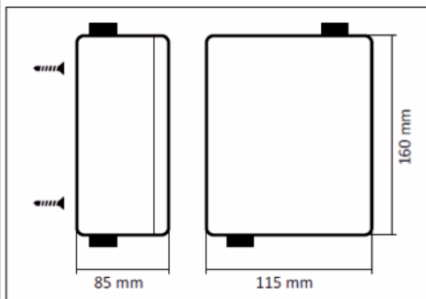

LE SPECIFICHE TECNICHE E LE IMMAGINI RIPORTATE IN QUESTA SCHEDA TECNICA SONO SOGGETTE A VARIAZIONI E AGGIORNAMENTI